

PORTA PHONE CO.
145 Dean Knauss Drive
Narragansett, RI 02882
Tel: 1-800-233-1113
In RI: 401-789-8700
Fax: 401-789-7300



www.portaphone.com

02/2009

Porta Phone Co. Competitor MC-1000 Wireless




**Competitor MC-1000
Wireless
Communication
System**



02/2009

www.portaphone.com

MC-1000 Competitor Wireless Features

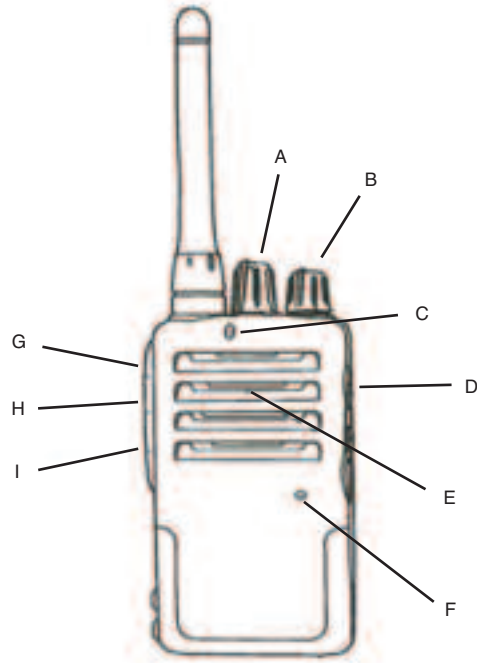

A	Channel Selector
B	Power Switch / Volume Control
C	LED Indicator
D	Accessory Jack
E	Speaker
F	Microphone
G	PTT Key
H	Call Key
I	Monitor

NOTE: To communicate properly, all radios in the group must be set to matching operating channels.

MC-1000 Competitor Wireless Instructions


Setting Up the Radios

1. Firmly attach the antenna to the radio by turning it clockwise until it tightens.
2. Install the military belt clip with the hardware included (located underneath battery).
3. Slide battery onto the back of the transceiver until the latch at the bottom clicks and holds it in place. Once the battery is installed follow the charging procedure before operation.

Charging

1. After purchase, or after extended storage (greater than 2 months) charge and discharge the battery two or three times.
2. Plug the AC adapter cable into the jack located on the rear of desktop charger base.
3. Slide the transceiver and battery pack into the charger.
4. Plug adapter into AC outlet.
5. Make sure the battery pack contacts are touching the terminals.
6. LED indications: RED: charging, ORANGE: 90% charge, GREEN: full charge.
7. Remove the transceiver from charging base when charging is completed.

MC-1000 Competitor Wireless Instructions

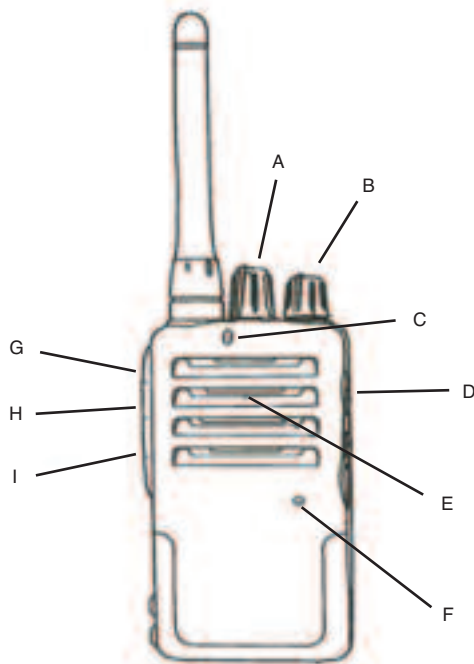

Operating Your Radios

1. The Power switch / volume control knob (B) turns the transceiver on and off and also sets the sound level of incoming signals. Turn the power switch / volume control clockwise to turn the transceiver on.
2. Set the operating channel via the Channel Selector (A). Rotate the Channel Knob setting it to the desired channel. Channel numbers are printed on the radio. In addition, the radio features an audible channel announcement and will tell the user the channel selected.
3. Before making a call, monitor the channel to make sure that no one is using the frequency (optional). To monitor the channel depress and hold the monitor button (I).
4. To make a call press and hold the PTT key (G) on the side of the radio and speak into the microphone. The LED indicator (C) will turn red confirming transmission.
5. For best voice translation speak directly into the microphone (F) using normal voice levels. Release the PTT key when you are finished speaking.

MC-1000 Competitor Wireless Instructions

Operating Your Radios (cont.)


6. Incoming messages are received through the built in speaker (E). Adjust the speaker sound level by rotating the volume control knob as follows: clockwise: higher, counter-clockwise: lower. Incoming messages are confirmed by green light on LED indicator.
7. The accessory jack (D) allows addition of audio equipment such as speaker microphone or headset. Use only those accessories that are specifically designed for use with this transceiver.
8. The MC-1000 features a call function that allows users in a group to alert select members of incoming messages. To set the radio to call mode press and hold down the call key (H) while turning the radio on.

Adjust the channel selector choosing a desired call tone, up to 15 different sounds are available. Press the PTT key to store this call tone and turn the radio off to set it in the call mode.

When you want to announce an upcoming transmission to a selected partner press the call key before using the PTT key and actually transmitting. Your partner will be alerted to the incoming message just before it arrives.

Using Your Headsets

Porta Phone headsets include a special noise cancelling microphone. For optimum performance adjust microphone boom so the element is directly in front of, and approximately 1 - 2" from the user's mouth.



***NOTE:** Do NOT service this equipment. If you require service, contact Porta Phone customer service at 1-800-233-1113.

MC-1000 Competitor Wireless Specifications

Specifications

- Professional UHF Transceiver
- 38 Privacy Codes Block Interference
- Range Up to 1 Mile
- Rugged Polycarbonate Body
- Military Belt Clip
- Rechargeable NiMH Battery
- Desktop Charger
- Positive Battery Charge Indicator
- 14 Channel Combinations
- RF Output Power .5 Watt Max.
- Frequency Stability +5PPM
- Operating Voltage 6.0V
- Dimensions 2"w x 1"d x 3.5"h
- Weight (w/ battery) 7 oz.
- Battery Life 8 hrs

Warranty

Porta Phone wired and wireless communication systems are warranted from defects in material and factory workmanship for a period of two years from the date of purchase.

Exclusions: Battery replacement due to lack of off season maintenance. Damage caused by misuse, accident, or water.

Returns: Porta Phone products may be returned for credit or refund only if received in the original packaging and in NEW condition within 30 days from purchase date. All shipments of Porta Phone products should be sent via UPS, FEDEX or the best available shipper, prepaid & insured.

Reconditioning

Factory reconditioning will be performed for the cost of replacement parts and radio retuning. Inbound and outbound shipping costs including "express" transportation are also the responsibility of the school.

Letter required: To ensure proper handling and timely equipment return enclose a letter. Indicate that you have sent the system for *reconditioning*. Include the following information:

your name & school
school address
telephone numbers / email address
school fax number
school repair purchase order number

Emergencies:

Call Monday morning for In-Season emergency help.

If a part is shipped to us overnight on Monday, we repair and return by Friday Guaranteed! (Rush shipping charges will apply)

Porta Phone is not responsible for inbound shipping costs.

Billing

Please provide a school purchase order number along with the name and address of the billing party responsible for payment.

Ship UPS or FEDEX only to:
PORTA PHONE
145 Dean Knauss Drive
Narragansett, RI 02882
Tel: 1-800-233-1113
In RI:401-789-8700
Fax: 401-789-7300